

Wall Mounting Watertight Metal Enclosures



IP 55 (IEC 529)



Optional Items



- * Transparent Door / Inner Door
- * Fan / Filter Ventilation




- * Modular Chassis




- * Rain Hood (outdoor)



- * Canopy (outdoor)



- * Plinth (100mm/200mmH)

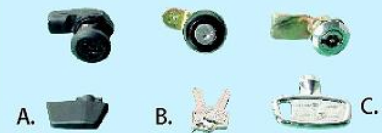

- A. PVC lock (CVS standard)
- B. Metal cam lock with keys
- C. Die cast quarter turn

- * A continuous seal of polyurethane gasket at door provide high IP protection.
- * Surface finished with polyester powder coating RAL7032 texture, CVS beige colour.
- * Galvanised mounting plate and wall mounting bracket.
- * 4 welded studs for fixing mounting plate.
- * Conceal hinges provide 130° door opening.
- * Earthing facilities on door, body and mounting plate.
- * Double folded gutter at door frame increases rigidity and prevents water from entering while door is opened



SIRM
Certified to MS ISO 9001:2005
Certification No. - LC020901